Flush Mounting STS-K003
STS-M56 Microphone
STS-S61 Speaker
STS-F70 Combined Staff Unit
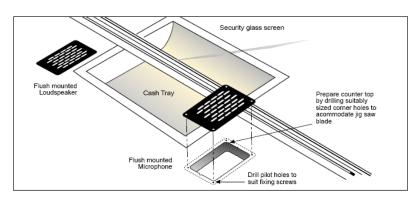

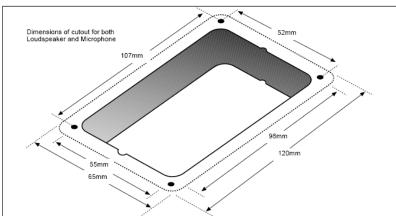Security glass screen
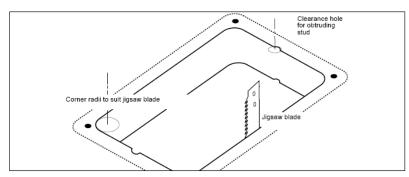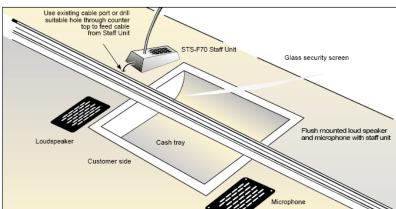
Flush mounted
Loudspeaker

Cash Tray

Prepare counter top
by drilling suitably
sized corner holes to
acommodate jig saw
blade

Flush mounted
Microphone

Drill pilot holes to
suit fixing screws

Figure 1

Dimensions of cutout for both
Loudspeaker and Microphone

52mm

107mm

98mm

120mm

55mm

65mm

Figure 2

Clearance hole
for obtruding
stud

Corner radii to suit jigsaw blade

Jigsaw blade

Figure 3

Use existing cable port or drill
suitable hole through counter
top to feed cable
from Staff Unit

STS-F70 Staff Unit

Glass security screen

Loudspeaker

Cash tray

Flush mounted loud speaker
and microphone with staff unit

Customer side

Microphone

Figure 4